Start AgenT and select

- Program
- Update Generator Firmware (XRG90 RAD/RF, C)

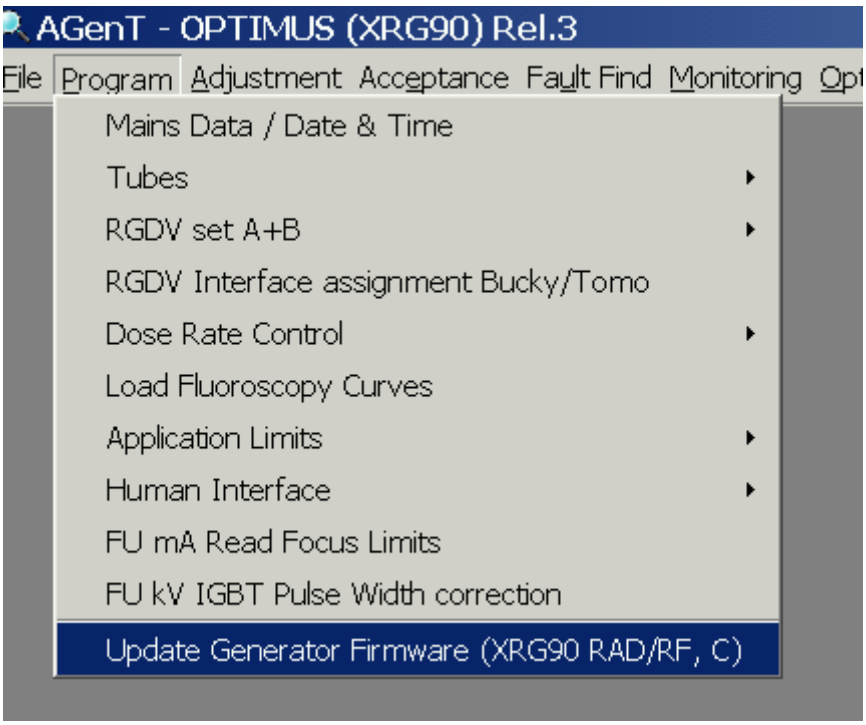

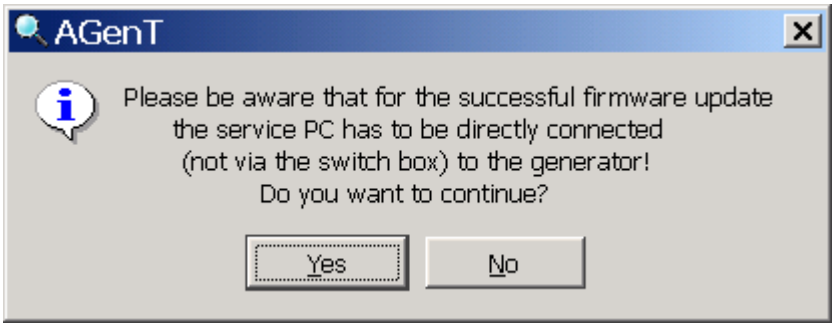
AGenT
Please be aware that for the successful firmware update
the service PC has to be directly connected
(not via the switch box) to the generator!
Do you want to continue?
Yes
No

Now select the appropriate file, e.g. release 3.5 RAD-R/F.

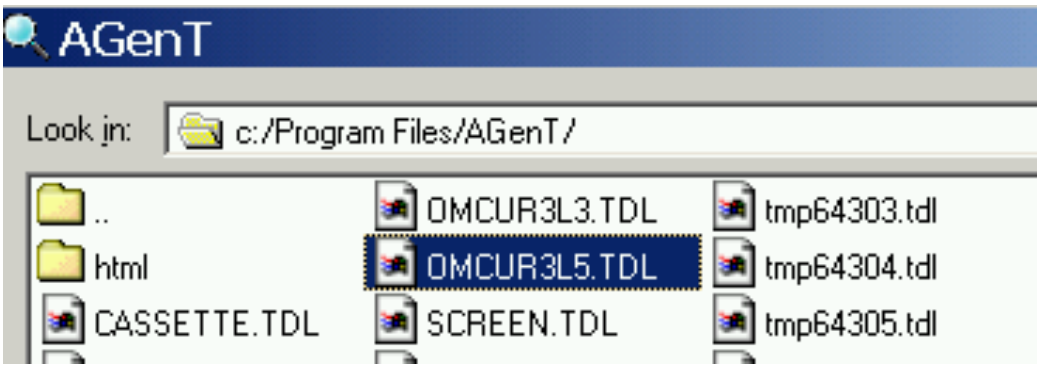

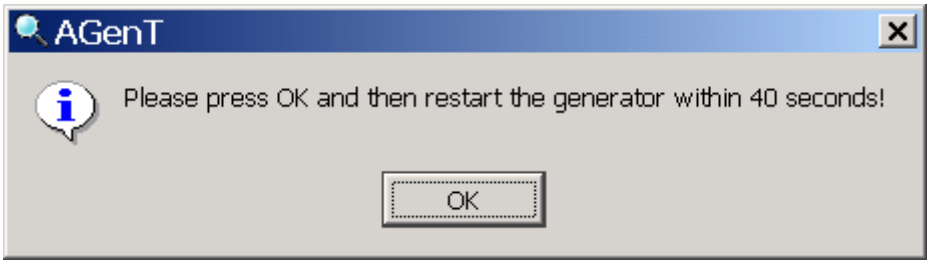

Once the loading process is started after generator reset the PC displays

The bar from 0 … 100 %, it disappears with 100%

Wait until the function unit LED's and at the end the CU LED stop blinking, then

appears.

If the generator is programmed (with at least one RGDV and one tube RAD-R/F or with the standard configuration C) ENK1 energizes after a while

If nothing is programmed yet LED's stay off and the generator counts dots waiting to be configured (RAD + R/F, Optimus C will indicate that the generator is not available on the Cockpit).